

Tontechnik im Musiktheater-Piano, Dortmund

PA-System:

JBL 4-Wege-Aktiv-System. 4 St. 2 x 15" Subs (Hornloaded) 4 St. 1 x 12" + 1 X 2" + Bullets

Total Power: 2 x 4000 W

Es gilt eine Lautstärkebeschränkung von 100 dBA!!! Das System kann erheblich mehr.

FOH:

1 Behringer X32 + Midas DL32; 1 St. System-Controller (Dbx); 4 St. Klark DN 370; 1 St. CDPlayer

Monitore:

Bis zu 7 Monitorwege vom FOH aus gesteuert an Wedges.



10 St. Wedges Showare 12" + 1"; 1 St. biamped Drumfill; 2 Amps 4 x 950 Watt

Mikrofone:

1 St. Beta 52; 1 St. Beta 56; 1 St. Beta 91; 5 St. E 604; 2 St. KM 184; 3 St. C451; 5 St. Sm 57; 6 St. Sm 58; 2 St. Beta 58; 1 St. MD 421; 2 St. E906; 2St. Beta58 Wirerless, 12 St. Dis active;

Stative, Kabel, u.s.w. reichlich vorhanden.

Bühnenlicht Im Musiktheater-Piano, Dortmund

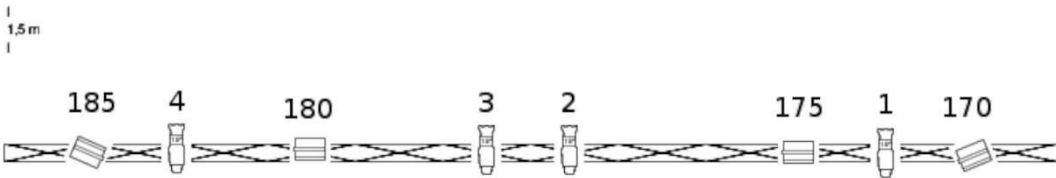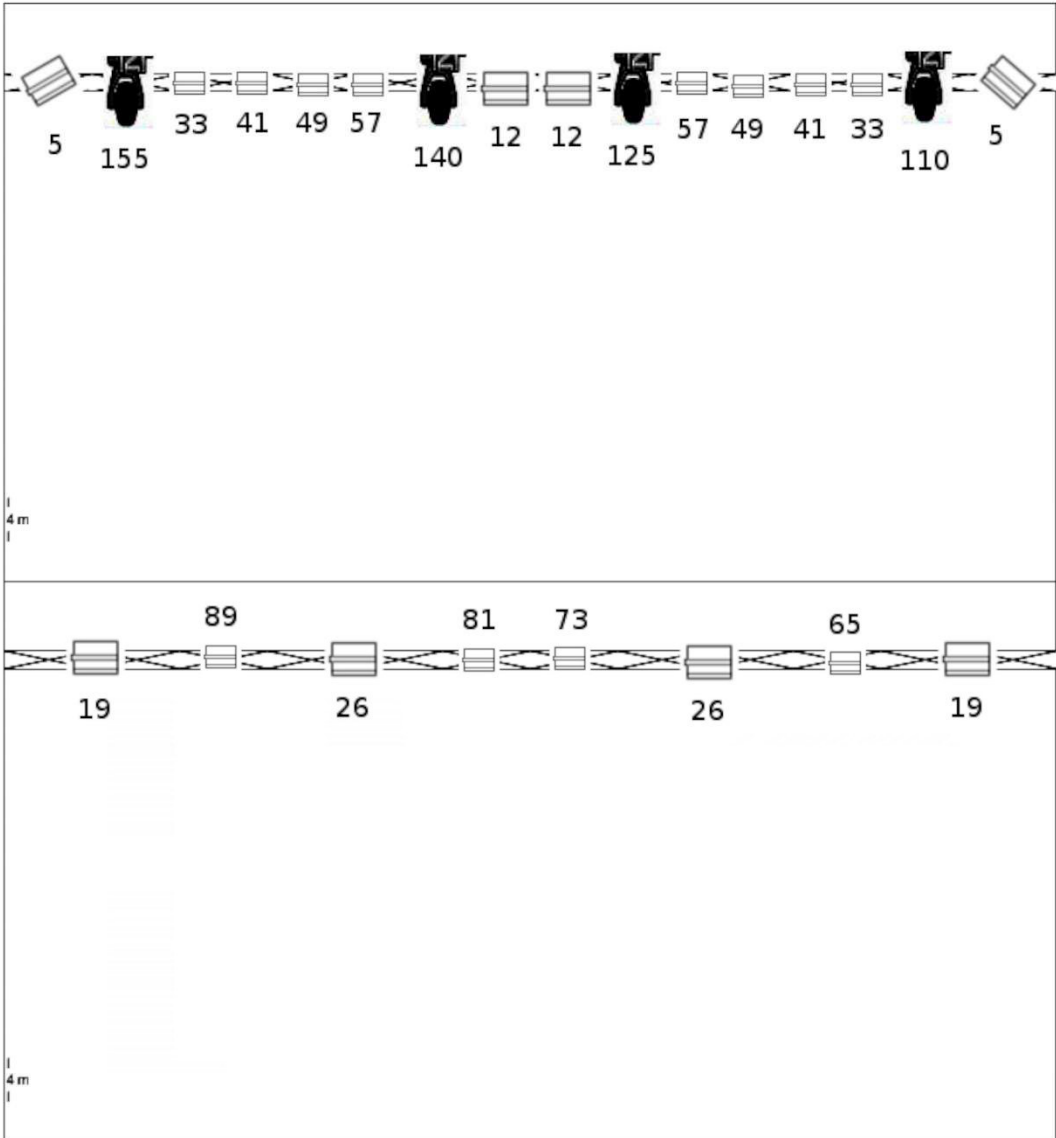

- PC (LED Planconvex)
 Flatpro (LED PAR RGBWA 100W)
- Move 30W LED
 LED PAR (LED PAR RGBW 140W)

DMX Adresse	Lampe	Funktion	Scanco Feature	Fixture	Mode
1	PC Front SR	Dimmer			1 Channel
2	PC Front Center	Dimmer			1 Channel
3	PC Front SL	Dimmer			1 Channel
4	PC Front Center Back	Dimmer			1 Channel
5	LED PAR Back aussen	Dimmer	Dimmer		7 Channel
6	LED PAR Back aussen	Strobe	Prism		7 Channel
7	LED PAR Back aussen	Red	Magenta		7 Channel
8	LED PAR Back aussen	Green	Yellow		7 Channel
9	LED PAR Back aussen	Blue	Cyan		7 Channel
10	LED PAR Back aussen	White	Shutter		7 Channel
11	LED PAR Back aussen	Bulid in Programms	Iris		7 Channel
12	LED PAR Back innen				7 Channel
19	LED PAR Mid aussen				7 Channel
26	LED PAR Mid innen				7 Channel
33	Flatpro Back 1	Dimmer	Dimmer		8 Channel
34	Flatpro Back 1	Strobe	Prisma		8 Channel
35	Flatpro Back 1	red	Red		8 Channel
36	Flatpro Back 1	Green	Green		8 Channel
37	Flatpro Back 1	Blue	Blue		8 Channel
38	Flatpro Back 1	White	Shutter		8 Channel
39	Flatpro Back 1	Amber	Iris		8 Channel
40	Flatpro Back 1	Built in Programs	not connected		8 Channel
41	Flatpro Back 2				8 Channel
49	Flatpro Back 3				8 Channel
57	Flatpro Back 4				8 Channel
65	Flatpro Midtruss 1				8 Channel
73	Flatpro Midtruss 2				8 Channel
81	Flatpro Midtruss 3				8 Channel
89	Flatpro Midtruss 4				8 Channel
110	Move 60W LED	Pan	Pan		13 Channel
111		Tilt	Tilt		13 Channel
112		Speed	Speed 1		13 Channel
113		Colorwheel	Color 1		13 Channel
114		Gobowheel	Gobo1		13 Channel
115		Gobo Rotation	Go1 Rot		13 Channel
116		Shutter (Strobe)	Shutter		13 Channel
117		Dimmer	Dimmer		13 Channel
118		Focus	Focus		13 Channel
119		Prism	Prism		13 Channel
120		Built in Programs	Iris		13 Channel
121		Pan Fine	Pan Fine		13 Channel
122		Tilt Fine	Tilt Fine		13 Channel
125	Move 60 W LED				13 Channel

140	Move 60 W LED				13 Channel
155	Move 60 W LED				13 Channel
170	Flatpro Front SR	RGBWA			5 Channel
175	Flatpro Front	RGBWA			5 Channel
180	Flatpro Front	RGBWA			5 Channel
185	Flatpro Front SL	RGBWA			5 Channel